



Gates & FENCES UK

HOW TO MEASURE FOR YOUR WOODEN BI-FOLD GATE

Please call us on 0800 6124 965 if you have any questions or visit www.gatesandfencesuk.co.uk.

First, take THREE measurements between the pillars/ posts. Across the top, middle and bottom (as shown below).



TOP:	MIDDLE:	BOTTOM:
------	---------	---------

Make a note of the SMALLEST measurement.

FIGURE 1:



FIGURE 1: (most popular set up)

Gates to open towards driveway. Hinge plates mounted to rear face of post/ pillar. Back edge of gate sits flush with the back edge of post/ pillar.

For a 3 leaf gate reduce 50mm (2") from your lowest measurement.

For a 4 leaf gate reduce 60mm (approx. 2 1/4") from your lowest measurement.

For a 5 leaf gate reduce 70mm (approx. 2 4/5") from your lowest measurement.



FIGURE 2:

Gates to open towards roadside. Hinge plates mounted to the front face of post/ pillar. Front edge of gate sits flush with the front edge of post/ pillar. Hinges are visible from the outside of property.

For a 3 leaf gate reduce 50mm (2") from your lowest measurement.

For a 4 leaf gate reduce 60mm (approx. 2 1/4") from your lowest measurement.

For a 5 leaf gate reduce 70mm (approx. 2 4/5") from your lowest measurement.

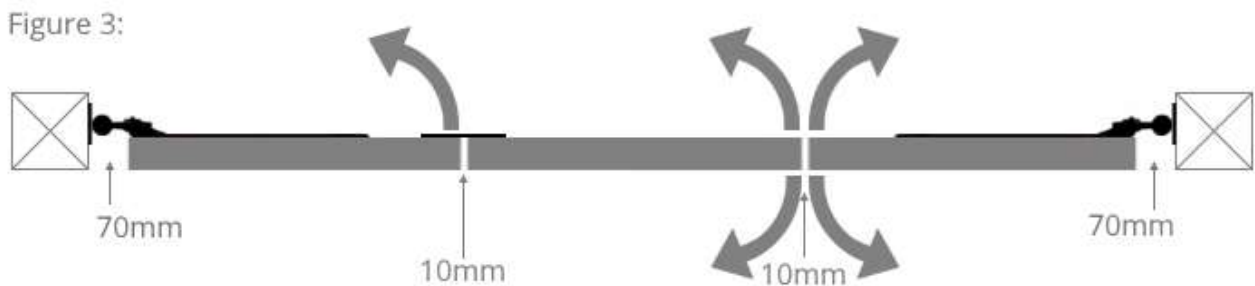


FIGURE 3:

Gates can open either way. Hinges are mounted to the internal face of the post/ pillar. Front edge of gate to be flush with front edge of post/ pillar.

For a 3 leaf gate reduce 160mm (approx. 6 1/2") from your lowest measurement.

For a 4 leaf gate reduce 170mm (approx. 6 4/5") from your lowest measurement.

For a 5 leaf gate reduce 180mm (approx. 7 1/4") from your lowest measurement.

If you have any questions, please call us direct on 0800 6124 965.
www.gatesandfencesuk.co.uk